Nuova macchina sterilizzatrice ad ultrasuoni per la sterilizzazione del disinfettante per sterline per parchi indoor a tappeto elastico

HEALTH

1. Automatico induzione, automatico umidità controllo;

2. Il nebbia presa può essere collegato con PVE tubo, aumentare il umidificazione la zona.

3. Automatico acqua afflusso, automatico acqua straripamento prot ezione, e acqua carenza protezione.

4. Piccolo nebbia e alto umidificazione efficienza, ampiamente Usat o in vario industrie e aria disinfezione.

5. Per disinfezione uso, rendere sicuro 1 per
cento sodio ipoclorito, 150 per cento acqua mescolare =
0,67% di ssodium ipoclorito.

Product Show

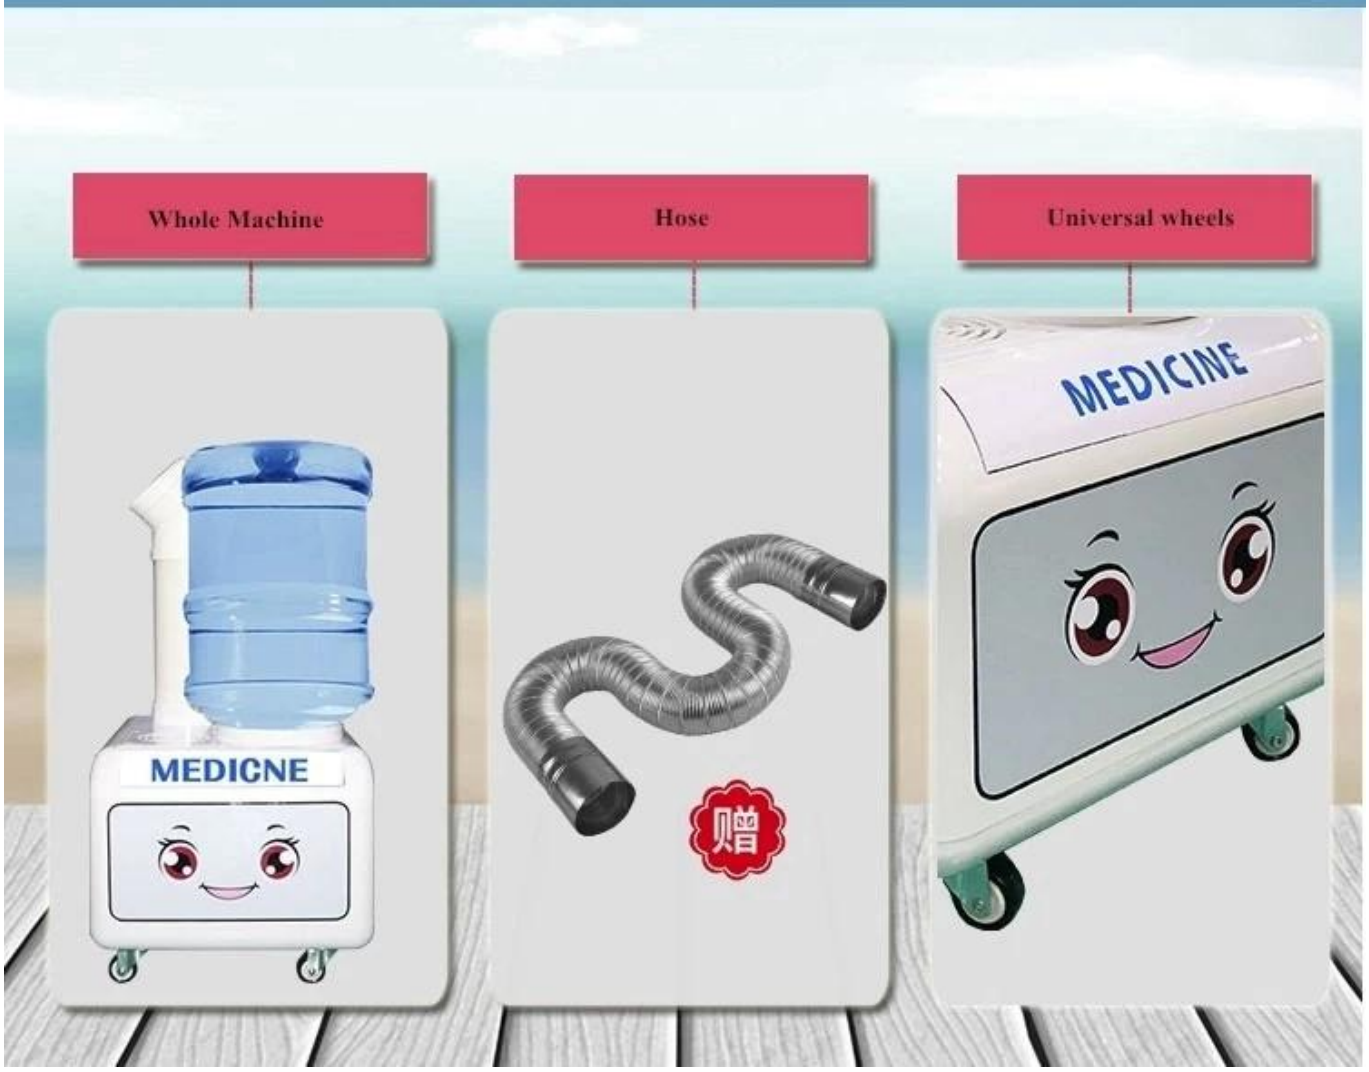

Features

1、Anti-rust and anti-corrosion
ABS material is safe
and durable .

2、
Cost-effective, independent
industrial-grade atomizing head,
a wider range of
atomizing particles

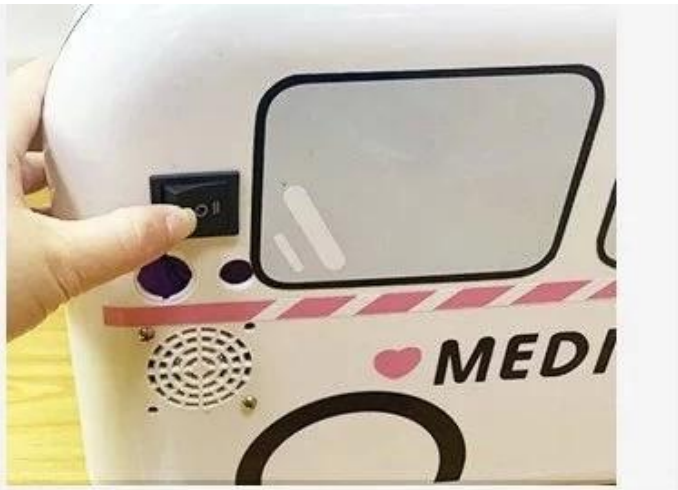

3、Two levels to adjust the amount of fog, evenly distributed, effective sterilization

4、

Hose assembly with direct access to the attachment surface

5、 Swivel wheels are easy to move

Steps

1 Prepare a clean bucket of pure water

2 Use a Phillips screwdriver to remove the cover plate screws above the atomizing port at one time

3

Use a sponge to clean the atomizing channel tube and the atomizing port. After wiping, load the cover on the atomizing port.

4

Disinfectant to water ratio 1: 4

5

Shake the bucket of pure water, fully dilute and dissolve

6 **Put the diluted pure water bucket on the machine, leave it for 1-3 minutes, and then turn on**

7 **Then adjust it as you want**