Новая машина для дезинфекции и дезинфекции ультразвуковых противотуманных стерилизаторов для использования на батутах в закрытых парках

HEALTH

1. автоматическая индукция, автоматический влажность контр оль;

2. туман торговая
точка Можно быть связаны с PVE трубы, увеличение увлажня ющая площадь.

3. автоматическая вода приток, автоматический вода переполн ение защита, а также вода нехватка защита.

4. Маленький туман а
также высокая увлажнение эффективность, широко используе мый в разные промышленности а также воздуха дезинфекция.

5. За дезинфекция использование, делать конечно 1 процент н атрий гипохлорит, 150 процент вода смешать =
0,67% из ssodium гипохлорит.

Product Show

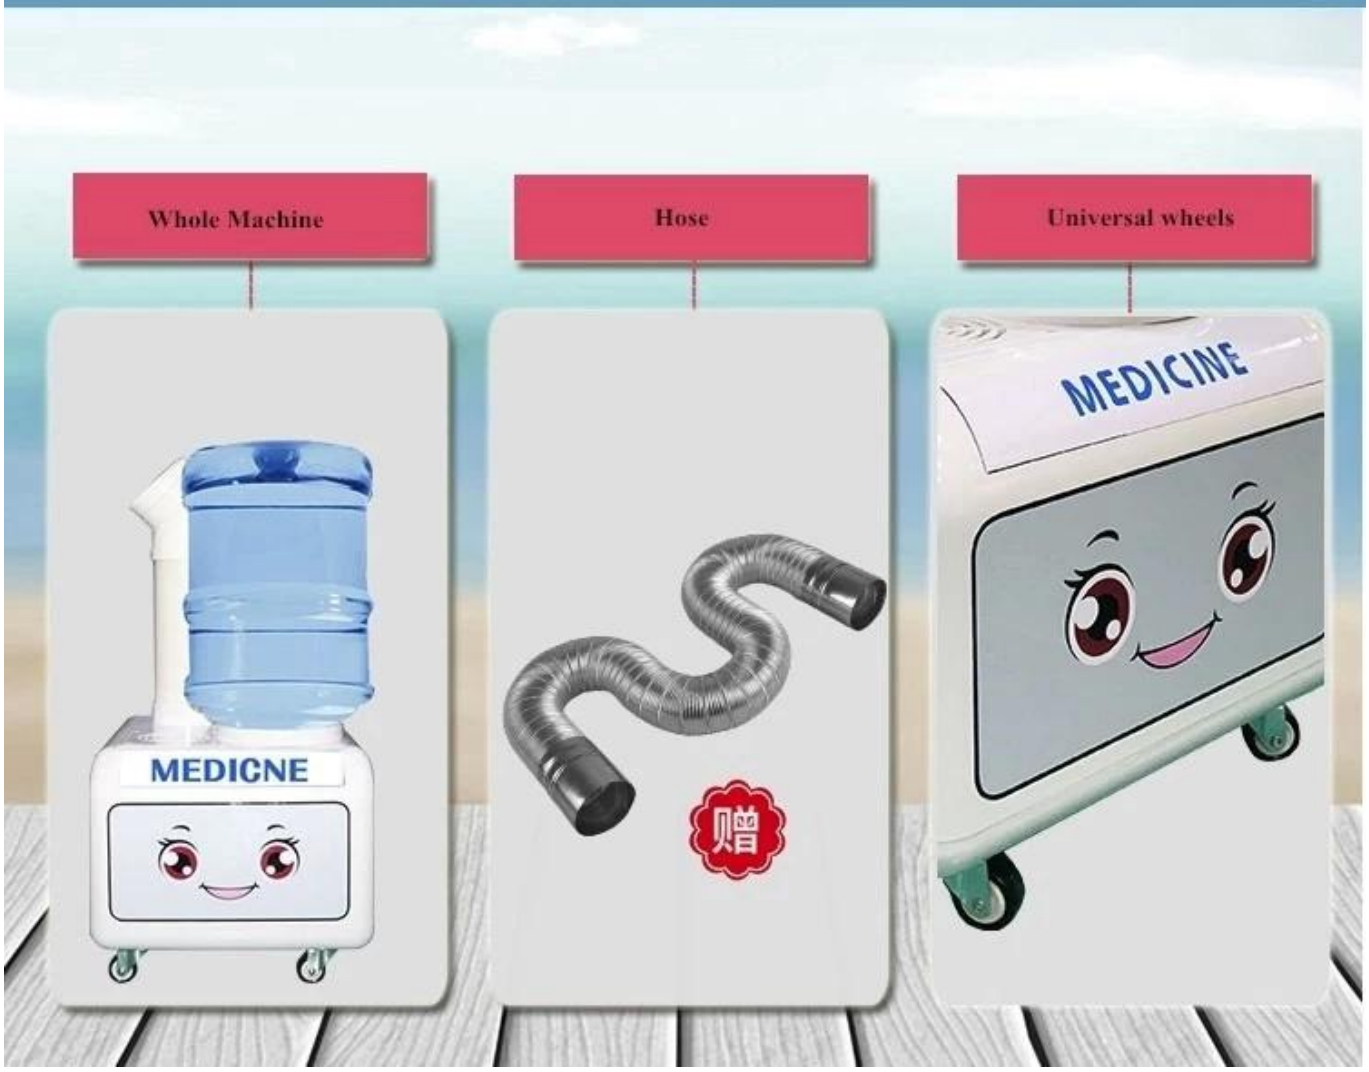

Features

1、Anti-rust and anti-corrosion
ABS material is safe
and durable .

2、

Cost-effective, independent
industrial-grade atomizing head,
a wider range of
atomizing particles

3、Two levels to adjust the amount of fog, evenly distributed, effective sterilization

4、

Hose assembly with direct access to the attachment surface

5、Swivel wheels are easy to move

Steps

1 **Prepare a clean bucket of pure water**

2 **Use a Phillips screwdriver to remove the cover plate screws above the atomizing port at one time**

3 Use a sponge to clean the atomizing channel tube and the atomizing port. After wiping, load the cover on the atomizing port.

4 Disinfectant to water ratio 1: 4

5 Shake the bucket of pure water, fully dilute and dissolve

6 **Put the diluted pure water bucket on the machine, leave it for 1-3 minutes, and then turn on**

7 **Then adjust it as you want**